

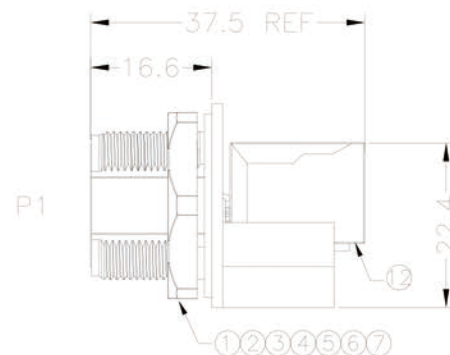
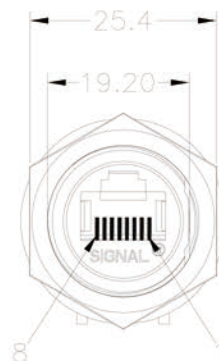


REV	DESCRIPTION	DATE	APPROVED
SO	CREATED DRAWING	2022/06/28	W N




P2



Detailed Product Description:
Waterproof connector rating is IP67
They can not be used permanently under water
Per ISO-20653,IEC60529

Electrical character
Rating voltage: 125V AC/DC
Insulation resistance: >100MΩ
Rating current: 1.5A
Contact resistance of connector ≤10mΩ
Mechanical characteristics: mating cycle >100cycles
Operating temperature: -25°C ~ +85°C

ALL MATERIALS ARE RoHS COMPLIANT

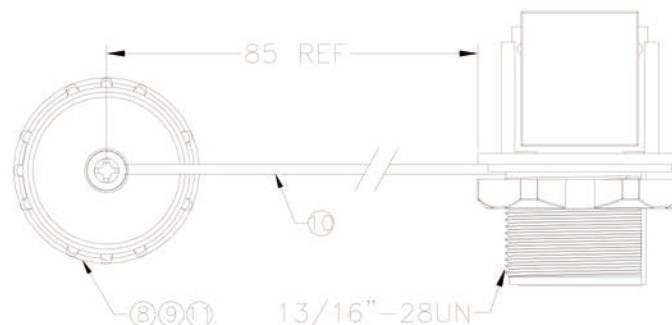

P1	P2
8P8C/F	8P8C/F
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8



Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE RJ45 8P8C/F TO
RJ45 8P8C/F Adapter

SGN NO	940008-04-004	REV.
DWG NO	SGNYD2206139-1543	
CUSTOMER		SO

TOLERANCES ARE:	THIRD ANGLE PROJECTION
DECIMALES	ANGLES
.X ±0.5	.X" ±2.0'
.XX ±0.20	.X" ±1.0'
SIZE: A4	UNITS: mm
SCALE: 1:1	SHEET: 1 OF 1