




Material:

- Waterproof rate: IP67
- Housing: Black, ABS 94V-0
- Contact Carrier: PBT, UL Recognized
- Contact Pin: Copper Alloy
- Contact Surface: Gold plated
- Temperature range: -20°C to 60°C
- Connector: HD-SUB 44pin Female or Male Shielded (solder pin)
- Seals for cable: OD: $\phi 6.0\text{mm}$ ~ $\phi 10.0\text{mm}$
- One set unassembled in one(1) PE bag

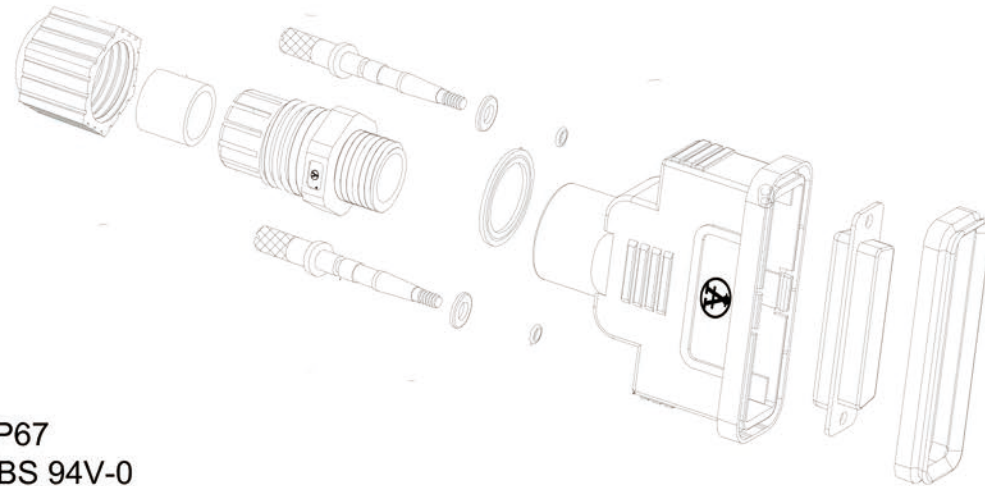

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2024/08/30	ZCH

 SIGNAL® Shenzhen Signal Electronics Co., LTD		TITLE HDB 44/F Plastic Assembly type (OD:6.0-10.0)	
		SGN NO 910244-02-011	REV.
DRAWN BY	DATE	DWG NO	S0
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	TOLERANCES ARE:	THIRD ANGLE PROJECTION  SIZE: A4 UNITS: mm
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		DECIMALES ANGLES .x ± 0.5 x." $\pm 2.0'$.xx ± 0.20 .x' $\pm 1.0'$	
E-mail: soudi@sz-signal.com		SCALE:	SHEET: 1 OF 1