




PROJECT NO:

SGNYDxxxxxx

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2023/07/10	CRB

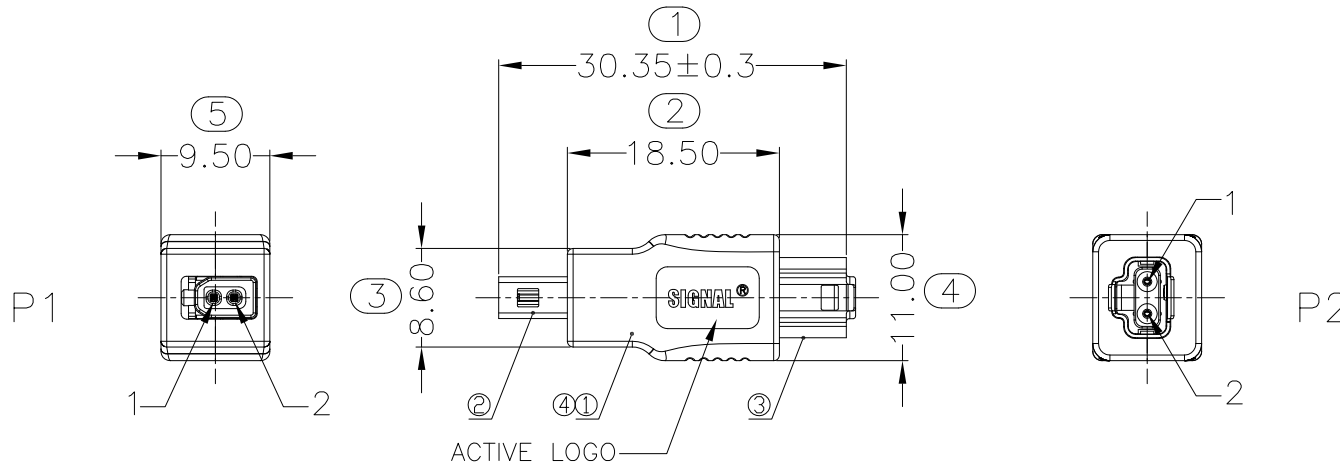

DETAILED PRODUCT DESCRIPTION:
 WATERPROOF CONNECTOR RATING IS IP20
 ELECTRICAL PROPERTIES AT +20°C
 RATING VOLTAGE: 60V/DC
 INSULATION RESISTANCE: >100MΩ
 RATING CURRENT: 1.4A
 CONTACT RESISTANCE OF CONNECTOR ≤20mΩ
 MECHANICAL CHARACTERISTICS: MATING CYCLE >750 CYCLES
 TRANSFER RATE: 100 Mbit/s
 OPERATING TEMPERATURE: -25°C ~ +85°C
 ACCORDING TO IEC 63171-2 AND IEC 63171-6

ALL MATERIALS ARE ROHS COMPLIANT

WIRE LIST

P1	P2
1	1
2	2
SHELL	SHELL

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
④	N/A	SPE PCB	1	PCS
③	N/A	SPE PLUG-IN CONNECTOR(IEC 63171-6)	1	PCS
②	N/A	SPE PLUG-IN CONNECTOR(IEC 63171-2)	1	PCS
①	N/A	ALUMINUM ALLOY SHELL, ANODIZED IN ITS NATURAL COLOR	1	SET

<p>SIGNAL[®]</p> <p>Shenzhen Signal Electronics co.,Ltd</p>		TITLE	
		SPE ADAPTER CONNECTOR	
DRAWN BY		DATE	
CHECKED BY		DATE	
APPROVED BY		DATE	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE: DECIMALES ANGLES .x ±0.5 x.' ±2.0' .xx ±0.2 .x' ±1.0'	
		THIRD ANGLE PROJECTION	
		SIZE: A4 UNITS: mm	
		SCALE: 1:1 SHEET: 1 OF 1	