
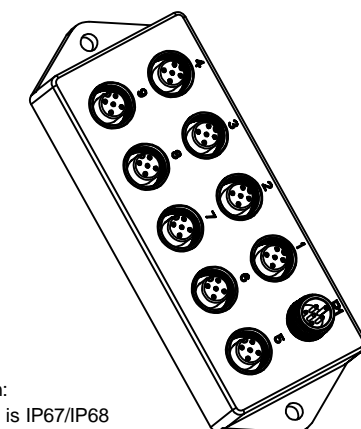


T/NO.			

REVISIONS			
REV.	DESCRIPTION	DATE	REVISED BY
S0	CREATED DRAWING	2014/10/14	ZERA
S1	UPDATED DRAWING	2014/10/17	ZERA
S2	UPDATED DRAWING	2014/11/07	ZERA

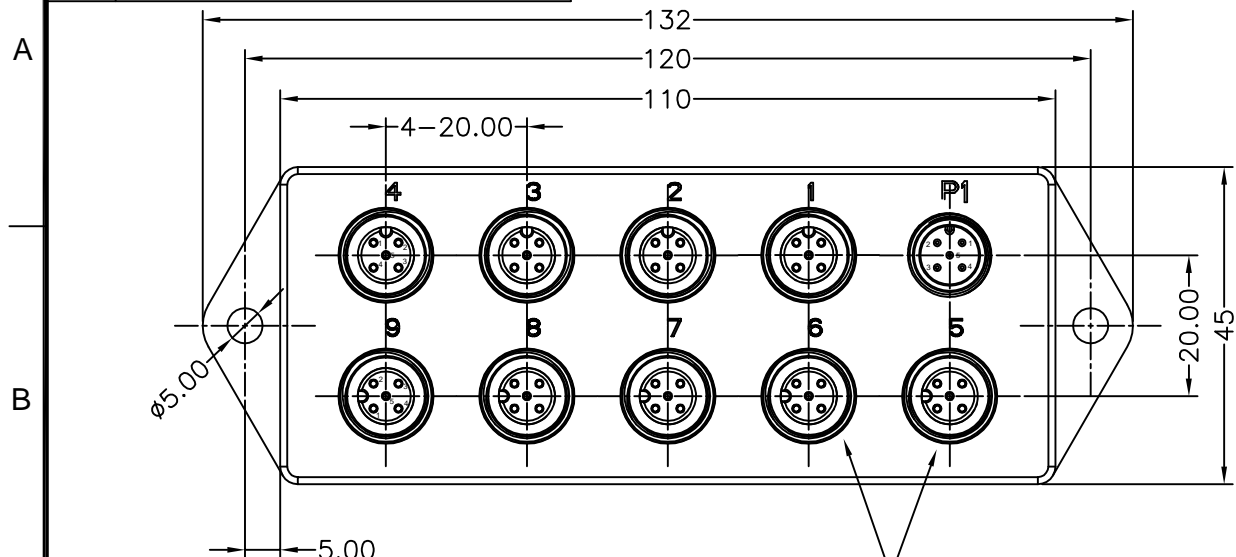


Detailed Product Description:  
 Waterproof connector rating is IP67/IP68  
 Protected from dust and water during immersion,  
 resistant to many oils and chemical etc

Electrical character  
 Rating voltage: 250V AC/DC ,  
 Insulation resistance: >100MΩ  
 Rating current : 4A  
 Contact resistance ≤10mΩ

Other Specification  
 Contact PIN: Brass with Gold plating.  
 Coupling nut/screw: Brass with nickel plating  
 Insulation plastic: PA66+GF  
 Degree of protection: IP67/IP68  
 Operating temperature: -25°C ~ +90°C

\*ALL MATERIALS ARE RoHS COMPLIANT.

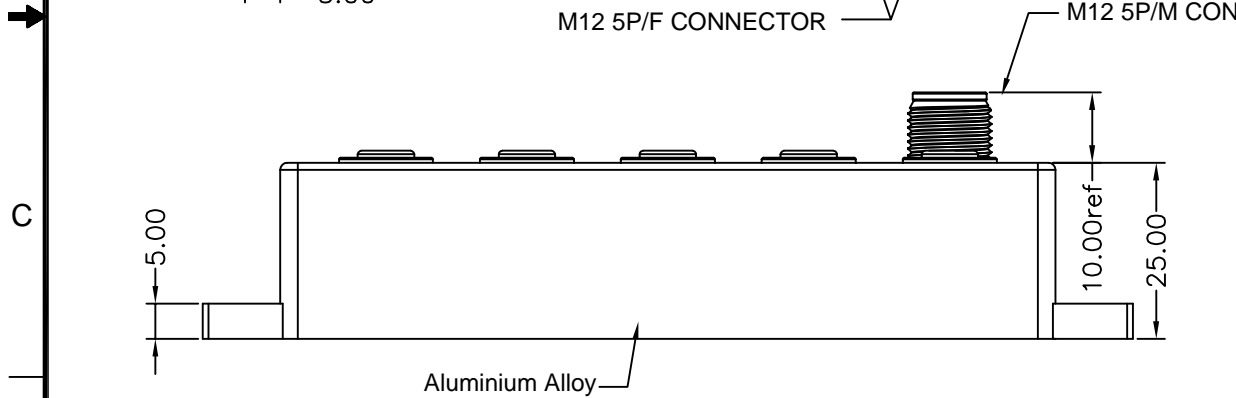

P1	1	2	3	4	5	6	7	8	9	WIRE LIST
1	1	1	1	1	1	1	1	1	1	
2	2	2	2	2	2	2	2	2	2	
3	3	3	3	3	3	3	3	3	3	
4	4	4	4	4	4	4	4	4	4	
5	5	5	5	5	5	5	5	5	5	

		TITLE		PROJECTION:		TOLERANCES UNLESS NOTED: .x ±0.15 .xx ±0.10 .xxx ±0.05 x.° ±1.0° .x° ±0.5°
		M12 9*5P/F+5P/M Splitter				
ELECTRONICS CO.,LTD		CUSTOMER PART NUMBER		UNITS:		
DRAWN BY:		DATE:		mm		
CHECKED BY:		DATE:		SCALE:		
SAELS BY:		DATE:		NONE		
APPROVED BY:		DATE:		SIZE:		
		SGN PART NUMBER		REV.   N/A		
		DRAWING NUMBER		REV.   S2		
		920105-09-001		SHEET:		
		SGNYD1410023				
		TOLERANCES UNLESS NOTED:				