


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2021/10/21	XFY

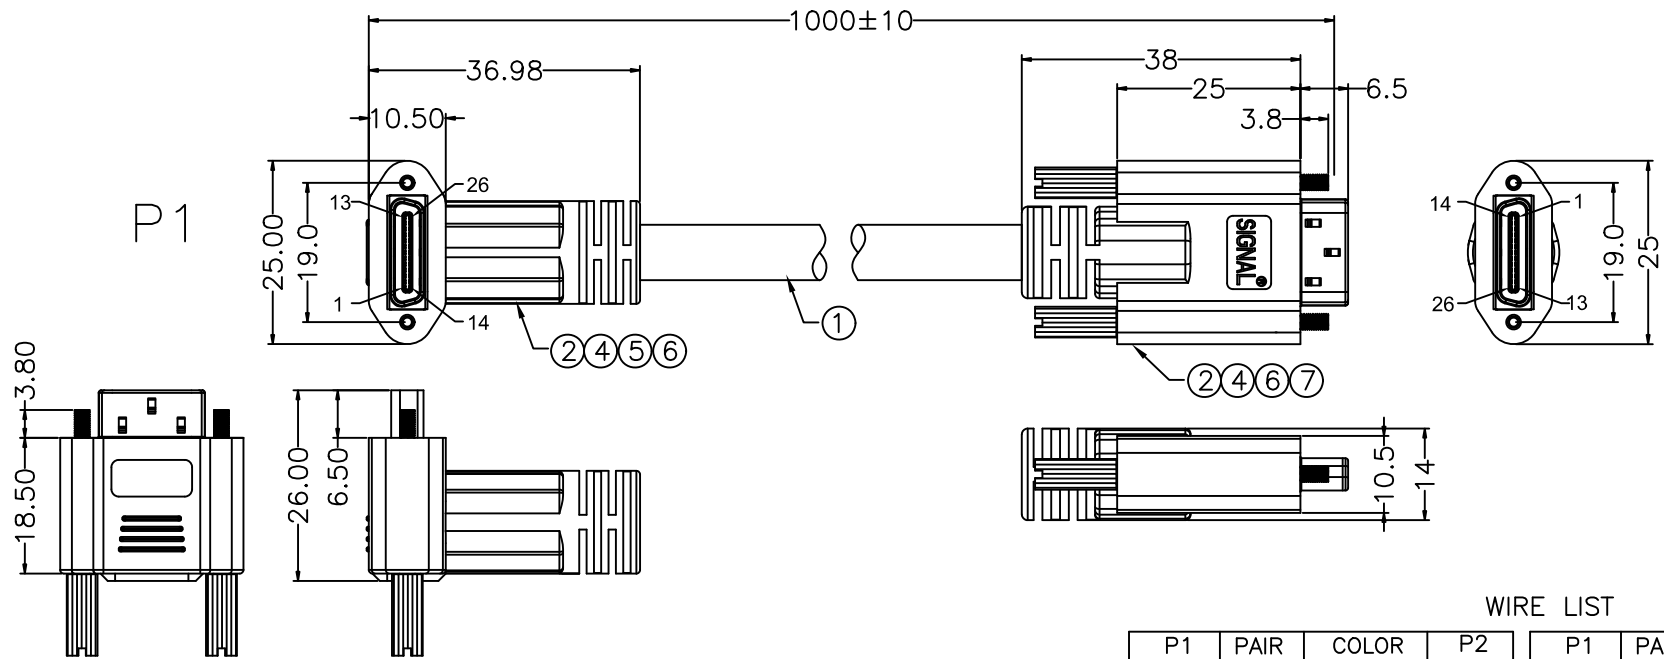


TESTING CONDITIONS:
 1. VOLTAGE:300V DC/0.1S.
 2. INSULATION RESISTANCE: 10 MOHMS MIN.
 3. CONDUCTIVE RESISTANCE: 5 OHMS MAX.
 4. 100% OPEN AND SHORT ELECTRICAL TEST.

*ALL MATERIALS ARE RoHS COMPLIANT.

WIRE LIST


P1	PAIR	COLOR	P2	P1	PAIR	COLOR	P2
1	---	RED	1	8	XX	WHITE	19
14	---	DRAIN	14	21	XX	YELLOW1	6
2	XX	WHITE	25	9	XX	WHITE	18
15	XX	WHITE1	12	22	XX	YELLOW2	5
3	XX	WHITE	24	10	XX	WHITE	17
16	XX	WHITE2	11	23	XX	YELLOW3	4
4	XX	WHITE	23	11	XX	WHITE	16
17	XX	WHITE3	10	24	XX	YELLOW4	3
5	XX	WHITE	22	12	XX	WHITE	15
18	XX	WHITE4	9	25	XX	YELLOW--	2
6	XX	WHITE	21	13	---	DRAIN	13
19	XX	WHITE---	8	26	---	BLACK	26
7	XX	WHITE	20	SHELL	---	BRAID	SHELL
20	XX	YELLOW	7				

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
⑥	SW00059	M2 NICKEL PLATED BRASS SCREW M2*33.2mm	2	PCS
⑤	PL00007	HD PE-L M2320	8	g
④	PL00011	BLACL PVC 45P	24	g
③	SW00059-2	M2 NICKEL PLATED BRASS SCREW M2*40mm	2	PCS
②	N/A	SDR 26P MALE CONNECTOR	2	SET
①	N/A	(1P*28#+AL.MYLAR)*11+2C*24#+2DRAIN+Teflon TAPE +AL.MYLAR+BRAID BLACK PVC OD:9.5MM	1	PCS



SIGNAL[®]
Shenzhen Signal Electronics co.,Ltd

DRAWN BY		DATE	TITLE	
CHECKED BY		DATE	SDR 26P/M 90° TO SDR 26P/M PVC CABLE	
CHECKED BY		DATE	SGN NO	940026-55-001
APPROVED BY		DATE	DWG NO	
			CUSTOMER	
			REV.	S0

TOLERANCES ARE:		THIRD ANGLE PROJECTION	
DECIMALES	ANGLES		
.x ±0.5	x.' ±2.0°	SIZE: A4	UNITS: mm
.xx ±0.20	.x' ±1.0°	SCALE: 1:1	SHEET: 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.