


A B C D E F G H I J

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2021/10/21	XFY

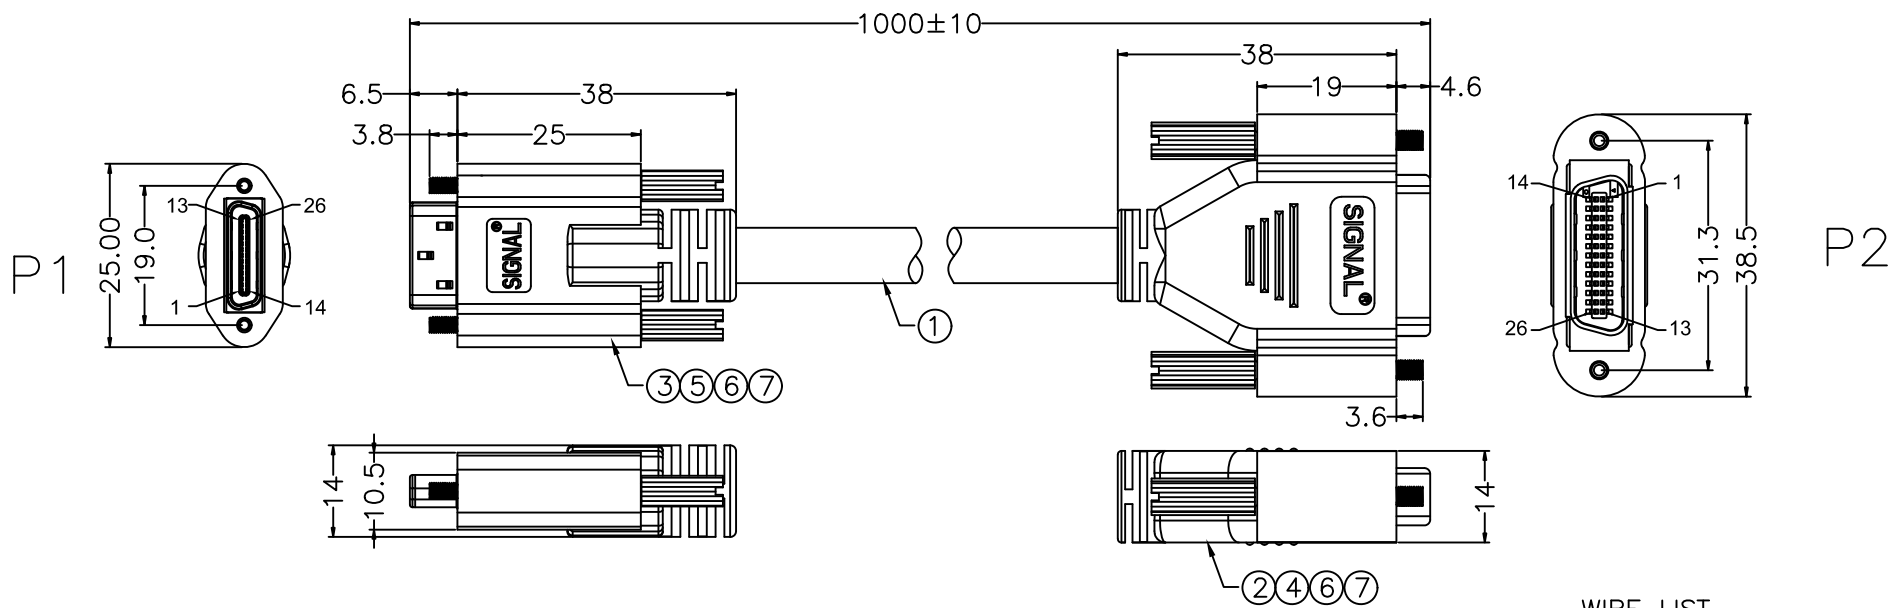

TESTING CONDITIONS:

1. VOLTAGE:300V DC/0.1S.
2. INSULATION RESISTANCE: 10 MOHMS MIN.
3. CONDUCTIVE RESISTANCE: 5 OHMS MAX.
4. 100% OPEN AND SHORT ELECTRICAL TEST.

\*ALL MATERIALS ARE RoHS COMPLIANT.

WIRE LIST

P1	PAIR	COLOR	P2	P1	PAIR	COLOR	P2
1	---	RED	1	8	---	WHITE	19
14	---	DRAIN	14	21	XX	YELLOW1	6
2	XX	WHITE	25	9	XX	WHITE	18
15	XX	WHITE1	12	22	XX	YELLOW2	5
3	XX	WHITE	24	10	XX	WHITE	17
16	XX	WHITE2	11	23	XX	YELLOW3	4
4	XX	WHITE	23	11	XX	WHITE	16
17	XX	WHITE3	10	24	XX	YELLOW4	3
5	XX	WHITE	22	12	XX	WHITE	15
18	XX	WHITE4	9	25	XX	YELLOW--	2
6	XX	WHITE	21	13	---	DRAIN	13
19	XX	WHITE---	8	26	---	BLACK	26
7	XX	WHITE	20	SHELL	---	BRAID	SHELL
20	XX	YELLOW	7				

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
⑦	PL00007	HD PE-L M2320	8	g
⑥	PL00011	BLACK PVC 45P	24	g
⑤	SW00059-2	M2 NICKEL PLATED BRASS SCREW M2*40mm	2	PCS
④	SW00059-3	M2.5 NICKEL PLATED BRASS SCREW M2.5*37mm	2	PCS
③	N/A	MDR 26P MALE CONNECTOR	1	SET
②	N/A	SDR 26P MALE CONNECTOR	1	SET
①	N/A	(1P*28#+AL.MYLAR)*11+2C*24#+2DRAIN+Teflon TAPE +AL.MYLAR+BRAID BLACK PVC OD:9.5MM	1	PCS

**SIGNAL**<sup>®</sup>  
Shenzhen Signal Electronics co.,Ltd

TITLE  
SDR 26P/M TO MDR 26P/M  
PVC CABLE

SGN NO 940026-55-005

DWG NO

CUSTOMER

TOLERANCES ARE:  
DECIMALES .x ±0.5  
.xx ±0.20

ANGLES x.' ±2.0°  
.x' ±1.0°

THIRD ANGLE PROJECTION

SIZE: A4 UNITS: mm  
SCALE: 1:1 SHEET: 1 OF 1

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

REV.	S0
------	----

A B C D E F G H I J