
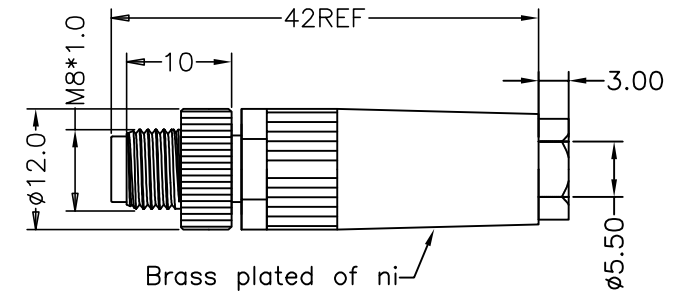


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2019/07/30	CYF

Detailed Product Description:
 Waterproof connector rating is IP67
 They can not be used permanently under water
 Per ISO-20653,IEC60529

Mechanical characteristics: mating / cycle >100cycles
 Operating temperature: -25°C ~ +85°C

ALL MATERIALS ARE RoHS COMPLIANT



TERMINATION:Solder

Electrical character

Part Number	Contacts	Rated voltage		Rated current	Contact Resistance	Cable OD (mm)
		A/C	D/C			
080103-01-002		50V	60V	3A	10mΩ	3~5.5
080104-01-002		50V	60V	3A	10mΩ	3~5.5
080205-01-001		30V	30V	3A	10mΩ	3~5.5
080106-01-001		30V	30V	1.5A	10mΩ	3~5.5
080108-01-001		30V	30V	1.5A	10mΩ	3~5.5



Shen Zhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

TITLE M8 MALE CONNECTOR WITH SHIELD

SGN NO	SEE TABLE	REV.
DWG NO		
CUSTOMER		S0

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TOLERANCES ARE:	THIRD ANGLE PROJECTION	
DECIMALES	ANGLES	SIZE: A4 UNITS: mm
.x ±0.5	x.* ±2.0°	SCALE: SHEET: 1 OF 1
.xx ±0.20	.x.* ±1.0°	