


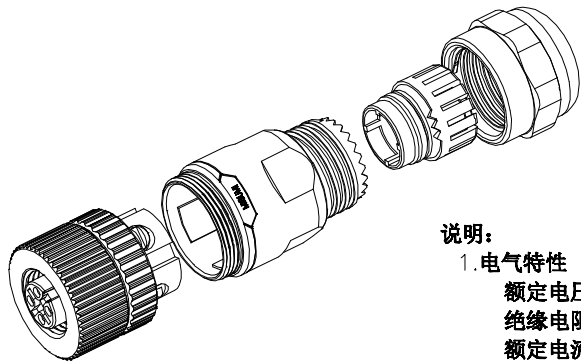

说明:

1. 电气特性

额定电压: 交流/直流250v,

绝缘电阻: > 100MΩ

额定电流: 4A

连接器的接触电阻≤5mΩ

2. 机械特性: 插拔/周期 >100 cycle



3. 环境特性

防护等级: IP67

操作温度: -25°C ~ + 85°C

4. 所有材料都符合RoHS标准。


5. 产品单PCS自封袋包装。

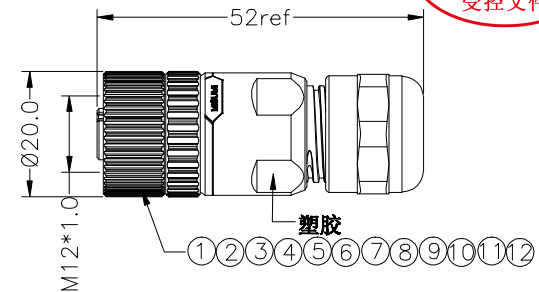


Termination:Screw



13	LB00002	白色铜板纸标签 L*W=50*30mm	1	PCS
12	CN00426-2	塑胶装配式卡环 蓝色 带客户LOGO"MiSUMi"	1	PCS
11	OR00012	M12 母头绿色氟胶材质防水胶圈 φ7.00*1.5mm	2	PCS
10	OR00048	绿色氟胶防水胶硅胶圈, φ10.0*φ1.5mm	1	PCS
9	OR00046	M12尾部密封环φ11.8*7.5mm 绿色氟胶	1	PCS
8	WK00174	M12 铝氧化银母头装配式螺母φ20*9.7mm	1	PCS
7	NU00034	M2.5*0.45 M12装配式螺丝	3	PCS
6	CN00253	M12塑胶装配式尾部六角螺母 (PA66+GF 黑色)	1	PCS
5	CN00252	M12塑胶装配式尾部八爪 (PA66 黑色)	1	PCS
4	CN00251	M12塑胶装配式主体 (PA66+GF 黑色)	1	PCS
3	CN00250	M12塑胶装配式固定主体螺母 (PA66+GF 黑色)	1	PCS
2	TE00223	Ø1.0母针磷青铜镀金, 偏心针 L=19.05mm	3	PCS
1	CN00247	M12 4P/F塑胶装配式胶芯 (PA66+GF 黑色)	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

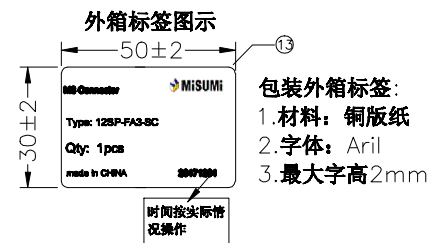

包装外箱标签:
1.材料: 铜版纸
2.字体: Arial
3.最大字高2mm



 SIGNAL®		TITLE M12 A 3P/F assembly connector(plastic)	
Shenzhen Signal Electronics Co., LTD		SGN NO 120103-02-022M	REV.
DRAWN BY	DATE	DWG NO SGN01035-652	A0
CHECKED BY	DATE	CUSTOMER 12SP-FA3-SC	
APPROVED BY	DATE	TOLERANCES ARE: DECIMALES .x ±0.15 .xx ±0.10	THIRD ANGLE PROJECTION SIZE: A4 UNITS: mm SCALE: SHEET: 1 OF 1
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.			