
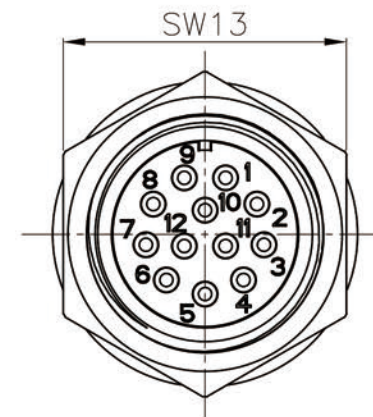
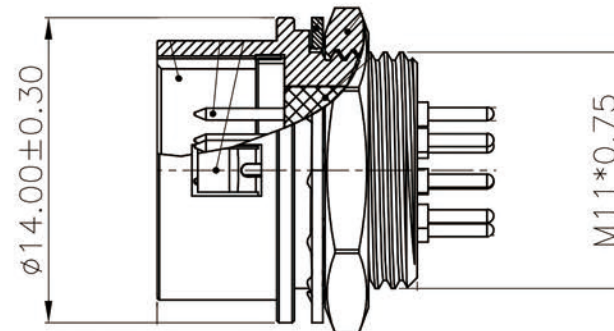


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2021/12/23	ZCH

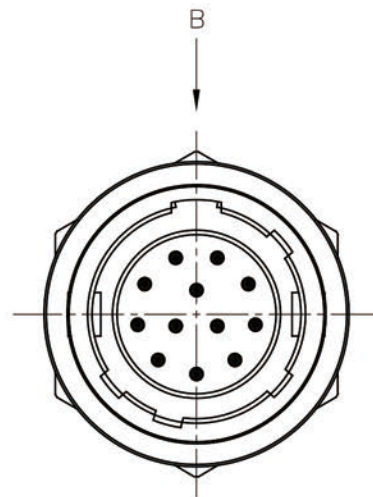

#### Detailed Product Description:

Connector Electrical Character

Rating Voltage: 300V AC,

Rating Current : 2A

Insulation Resistance: >1000M ohms


Contact Resistance Of Connector ≤10m ohms


Mechanical Characteristics:

Mating / Cycle >1000 Cycles

Operating Temperature: -25°C ~ +85°C

\*All Materials Are RoHS Compliant.

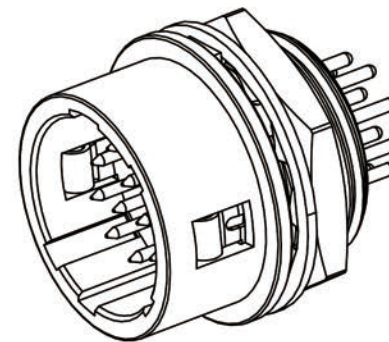

 <b>SIGNAL®</b> Shenzhen Signal Electronics co.,Ltd		TITLE PUSH PULL 12PIN RECEPTACLE (DIP TYPE)	
		SGN NO 950112-03-002	REV.
DRAWN BY	DATE	DWG NO	S0
CHECKED BY	DATE	CUSTOMER	
CHECKED BY	DATE		
APPROVED BY	DATE		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	THIRD ANGLE PROJECTION
		DECIMALES ANGLES	SIZE: A4 UNITS: mm
.x ±0.5	x.* ±2.0°		SCALE: 1:1 SHEET: 1 OF 1
.xx ±0.20	.x.* ±1.0°		