




REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2019/11/09	CYF
S1	Updated drawings	2020/01/03	CYF
S2	Updated drawings	2024/07/11	CYF

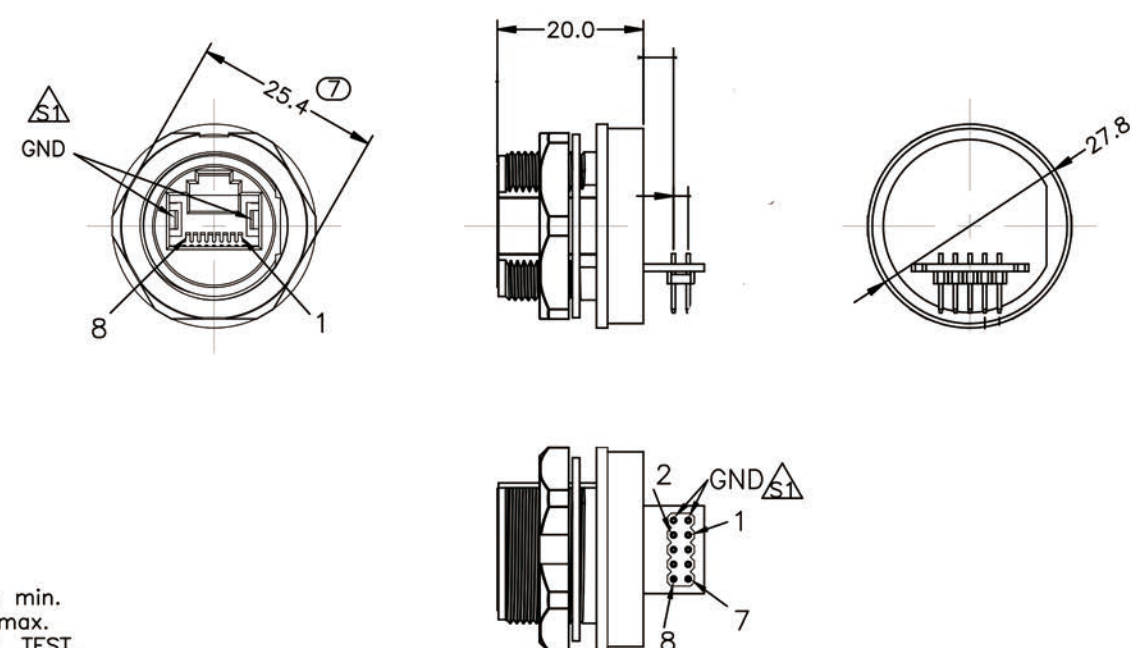

TESTING CONDITIONS:
1. VOLTAGE: 300V DC/0.1S.
2. INSULATION RESISTANCE: 10 Mohms min.
3. CONDUCTIVE RESISTANCE: 5 Ohms max.
4. 100% OPEN AND SHORT ELECTRICAL TEST.

*ALL MATERIALS ARE RoHS COMPLIANT.

 SIGNAL® Shenzhen Signal Electronics co.,Ltd		TITLE RJ45 FEMALE 8P8C FRONT FASTENED CONNECTOR DIP	
DRAWN BY	DATE	SGN NO 940008-00-007	REV.
CHECKED BY	DATE	DWG NO	S1
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	TOLERANCES ARE: DECIMALES ANGLES .x ±0.50 x.* ±2.0° .xx ±0.20 x.* ±1.0°	THIRD ANGLE PROJECTION 
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		SIZE: A4	UNITS: mm
		SCALE: 1:1	SHEET: 1 OF 1