



PROJECT NO:
SGNN2404036

REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2024/05/16	ZCH
A1	更改外壳后段形状及尺寸	2024/11/27	ZCH
A1	更改外壳后段形状及尺寸	2024/11/27	ZCH

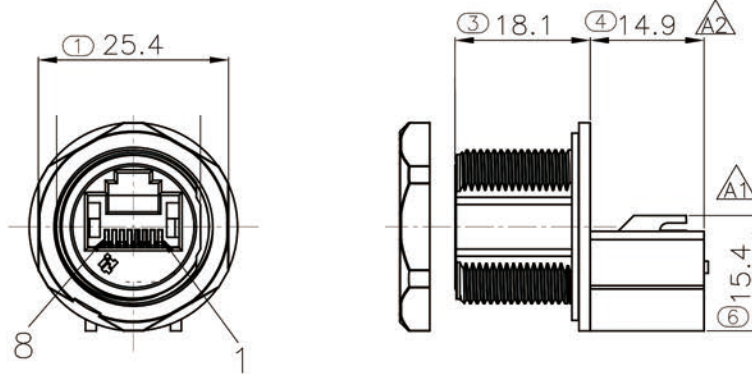

说明:

- 电气特性
额定电压: 交流/直流125V
绝缘电阻: > 100M Ω
额定电流: 1.5A
连接器的接触电阻 $\leq$ 40m Ω
- 机械特性: 插拔/周期 >100 Cycles
- 环境特性
防护等级: IP67
操作温度: -40 $^{\circ}$ C $\sim$ +105 $^{\circ}$ C
- 装配说明:
防尘帽胶垫: 凸出端朝内
防尘铆螺钉: 不能扭太紧, 防止旋转时打结
- 首件做防水测试(IP67)、网络测试(CAT-5)
导通测试须全检
- 有标示“▲”记号的为重点检查尺寸, “ $\otimes$ ”标号为首件全尺寸检查
- 包装参考940008-04-006-T这款产品包装方式
- 所有材料都符合RoHS标准。

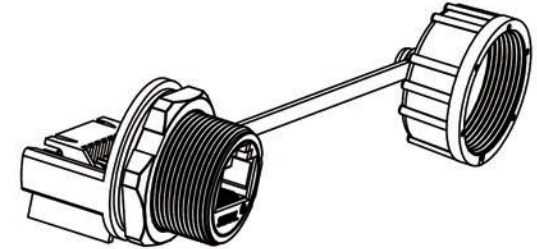

 SIGNAL[®] Shenzhen Signal Electronics co.,Ltd	TITLE RJ45 8P8C/F TO XH2.5	
	SGN NO 940008-04-011-T	REV. A1
DRAWING BY	DATE	DWG NO SGN01017-734
CHECKED BY	DATE	CUSTOMER
CHECKED BY	DATE	
APPROVED BY	DATE	
TOLERANCES ARE: DECIMALES ANGLES		THIRD ANGLE PROJECTION
.x $\pm$ 0.5 .xx $\pm$ 0.20		x.* $\pm$ 2.0 $^{\circ}$.x* $\pm$ 1.0 $^{\circ}$
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		SIZE: A4 SCALE: 1:1
		UNITS: mm SHEET: 1 OF 1