
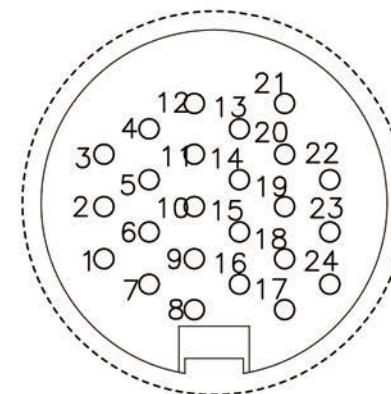
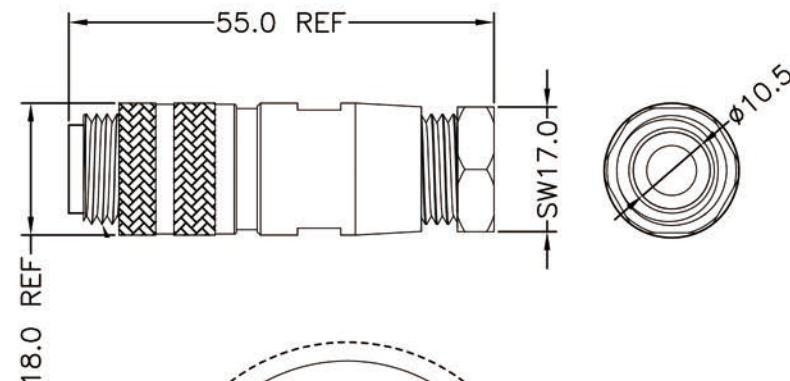


REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2018/06/08	CYF

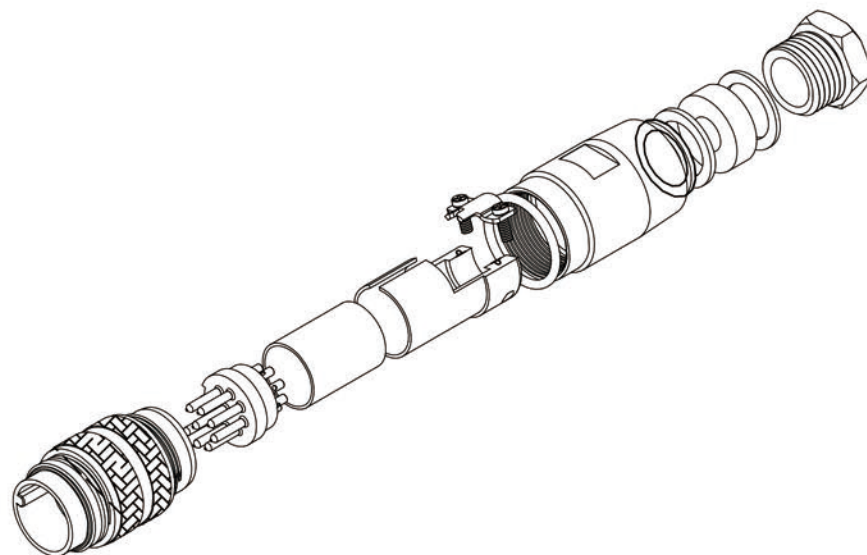

SCALE: 4:1
DETAIL A

Detailed Product Description:

Waterproof connector rating is IP68(Behind the lock)
They can not be used permanently under water.

Connector Electrical character

Rating voltage:60V AC/DC ,

Insulation resistance: >100MΩ



Rating current :1A

Contact resistance of connector ≤5mΩ

Mechanical characteristics: mating / cycle >100 cycle

Operating temperature: -25°C ~ +85°

*ALL MATERIALS ARE RoHS COMPLIANT.

 SIGNAL®		TITLE M16 24P/M ASSEMBLY CONNECTOR	
Shenzhen Signal Electronics Co., LTD		SGN NO 160024-01-002	REV.
DRAWN BY	DATE	DWG NO ASM16M24001	A0
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	
		DECIMALES	ANGLES
		.x ±0.5 .xx ±0.20	x.' ±2.0' .x' ±1.0'
			
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1