

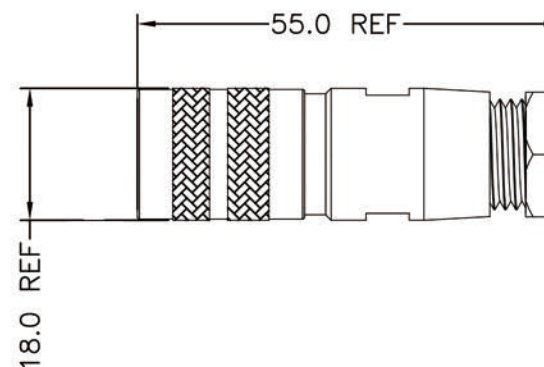


REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2018/06/08	CYF

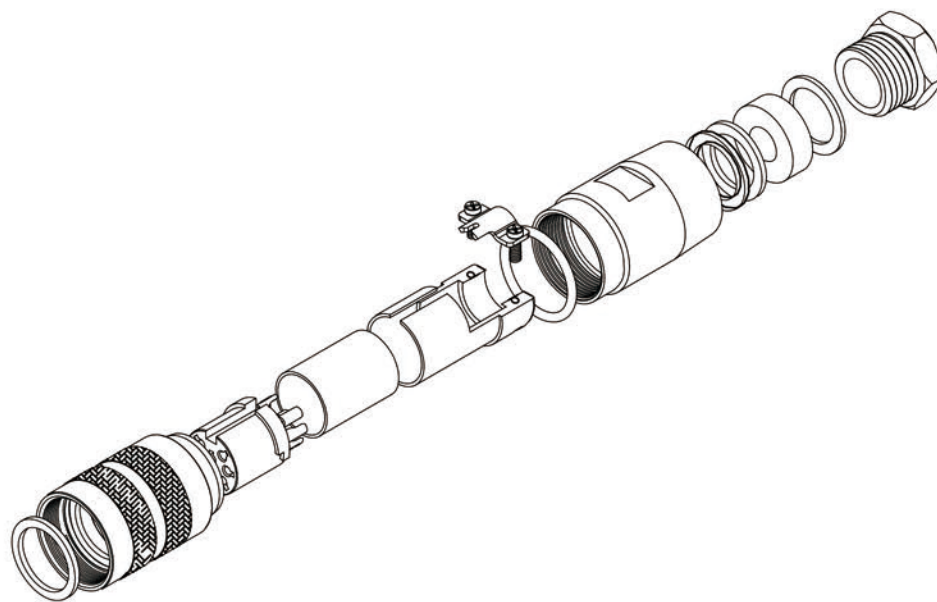

Detailed Product Description:

Waterproof connector rating is IP68(Behind the lock)
They can not be used permanently under water.

Connector Electrical character

Rating voltage:60V AC/DC ,

Insulation resistance: >100MΩ


Rating current :3A

Contact resistance of connector ≤5mΩ

Mechanical characteristics: mating / cycle >100 cycle

Operating temperature: -25°C ~ +85°

*ALL MATERIALS ARE RoHS COMPLIANT.

 SIGNAL® Shenzhen Signal Electronics Co., LTD		TITLE M16 19P/F ASSEMBLY CONNECTOR	
		SGN NO 160019-02-001	REV.
DRAWN BY	DATE	DWG NO ASM16F19001	A0
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	TOLERANCES ARE:	THIRD ANGLE PROJECTION
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small>		DECIMALES	ANGLES
		.x ±0.5	x.' ±2.0'
		.xx ±0.20	.x' ±1.0'
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1