
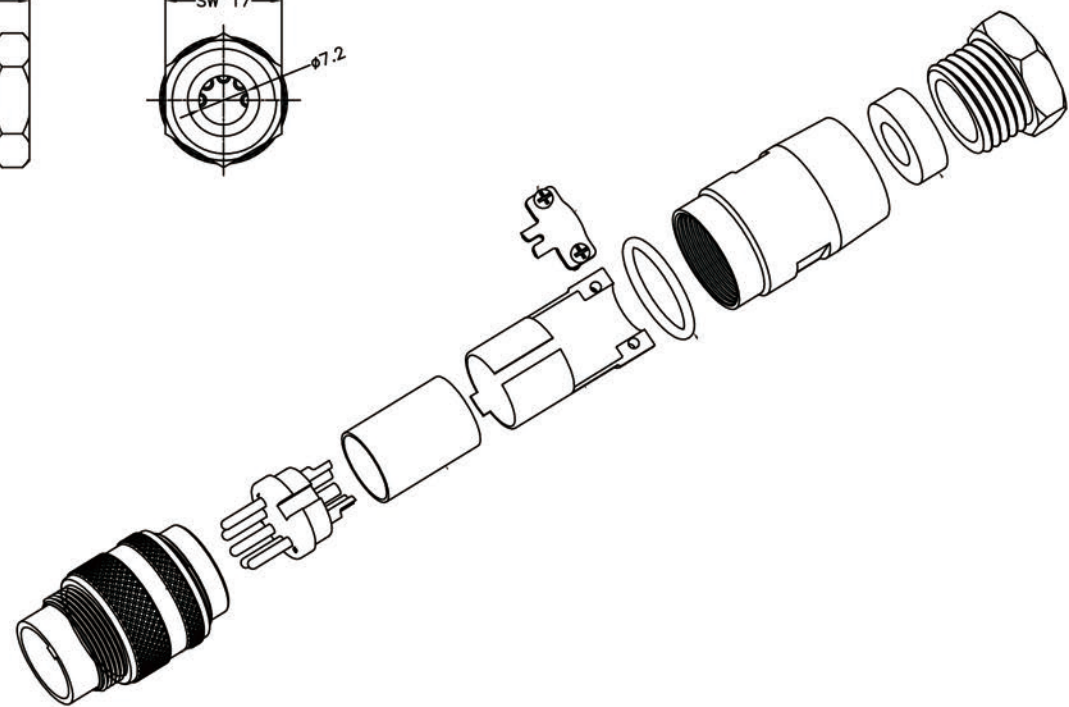

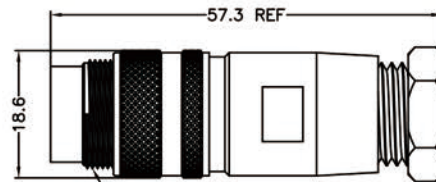


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2019/06/28	LXQ




Detailed Product Description:
Waterproof connector rating is IP67
They can not be used permanently under water.

Connector Electrical Character

Rating voltage: 32V AC/DC
Insulation resistance: $>100M\Omega$
Rating current: 5A
Contact resistance of connector: $\leq 5m\Omega$
Mechanical characteristics: mating/cycle >100 cycle
Operating temperature: $-25^{\circ}C \sim +85^{\circ}C$

*ALL MATERIALS ARE RoHS COMPLIANT.

 SIGNAL® Shenzhen Signal Electronics Co., LTD		TITLE	
		M16 5PIN MALE ASSEMBLY CONNECTOR	
DRAWN BY		DATE	REV.
CHECKED BY		DATE	
APPROVED BY		DATE	S0
TOLERANCES ARE:		THIRD ANGLE PROJECTION	
DECIMALES	ANGLES	SIZE: A4	UNITS: mm
.x ± 0.5	x.' $\pm 2.0^{\circ}$	SCALE:	SHEET: 1 OF 1
.xx ± 0.20	.x' $\pm 1.0^{\circ}$		

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.