
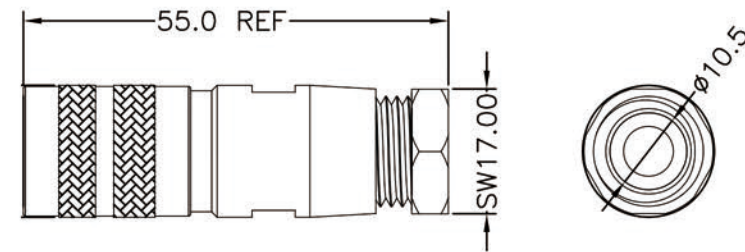


REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2018/06/04	CYF

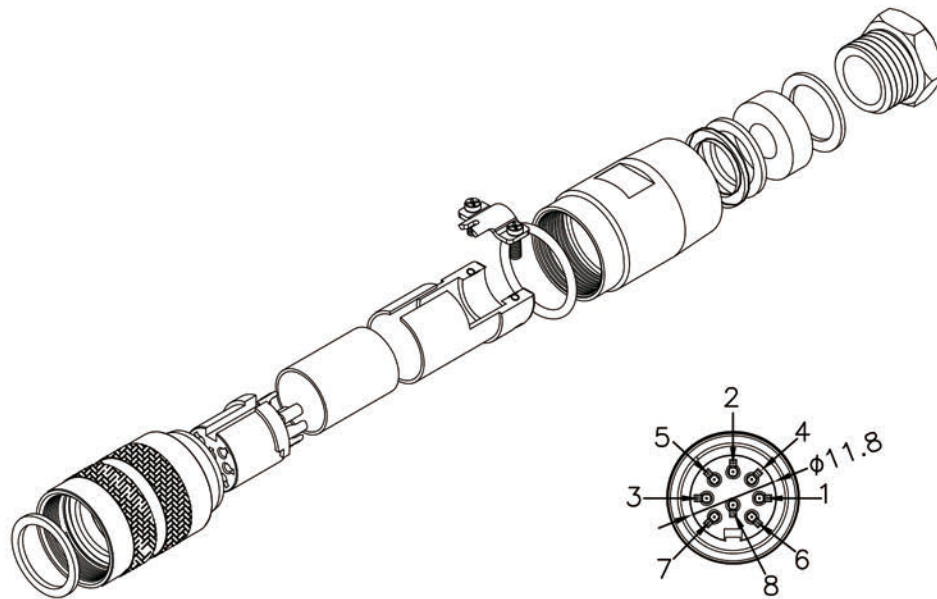



Detailed Product Description:

Waterproof connector rating is IP68(Behind the lock)
They can not be used permanently under water.

Connector Electrical character

Rating voltage:60V AC/DC ,
Insulation resistance: >100M Ω
Rating current :5A
Contact resistance of connector $\leq 5\text{m}\Omega$
Mechanical characteristics: mating / cycle >100 cycle
Operating temperature: $-25^{\circ}\text{C} \sim +85^{\circ}$

*ALL MATERIALS ARE RoHS COMPLIANT.

 SIGNAL®		TITLE M16 8P/F ASSEMBLY CONNECTOR			
Shenzhen Signal Electronics Co., LTD		SGN NO 160008-02-001	REV.		
DRAWN BY	DATE	DWG NO ASM16F08D001	A0		
CHECKED BY	DATE	CUSTOMER			
APPROVED BY	DATE	TOLERANCES ARE:			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		DECIMALES	ANGLES	THIRD ANGLE PROJECTION	
		.x ±0.5	.x' ±2.0°	SIZE: A4	UNITS: mm
		.xx ±0.20	.x' ±1.0°	SCALE:	SHEET: 1 OF 1