


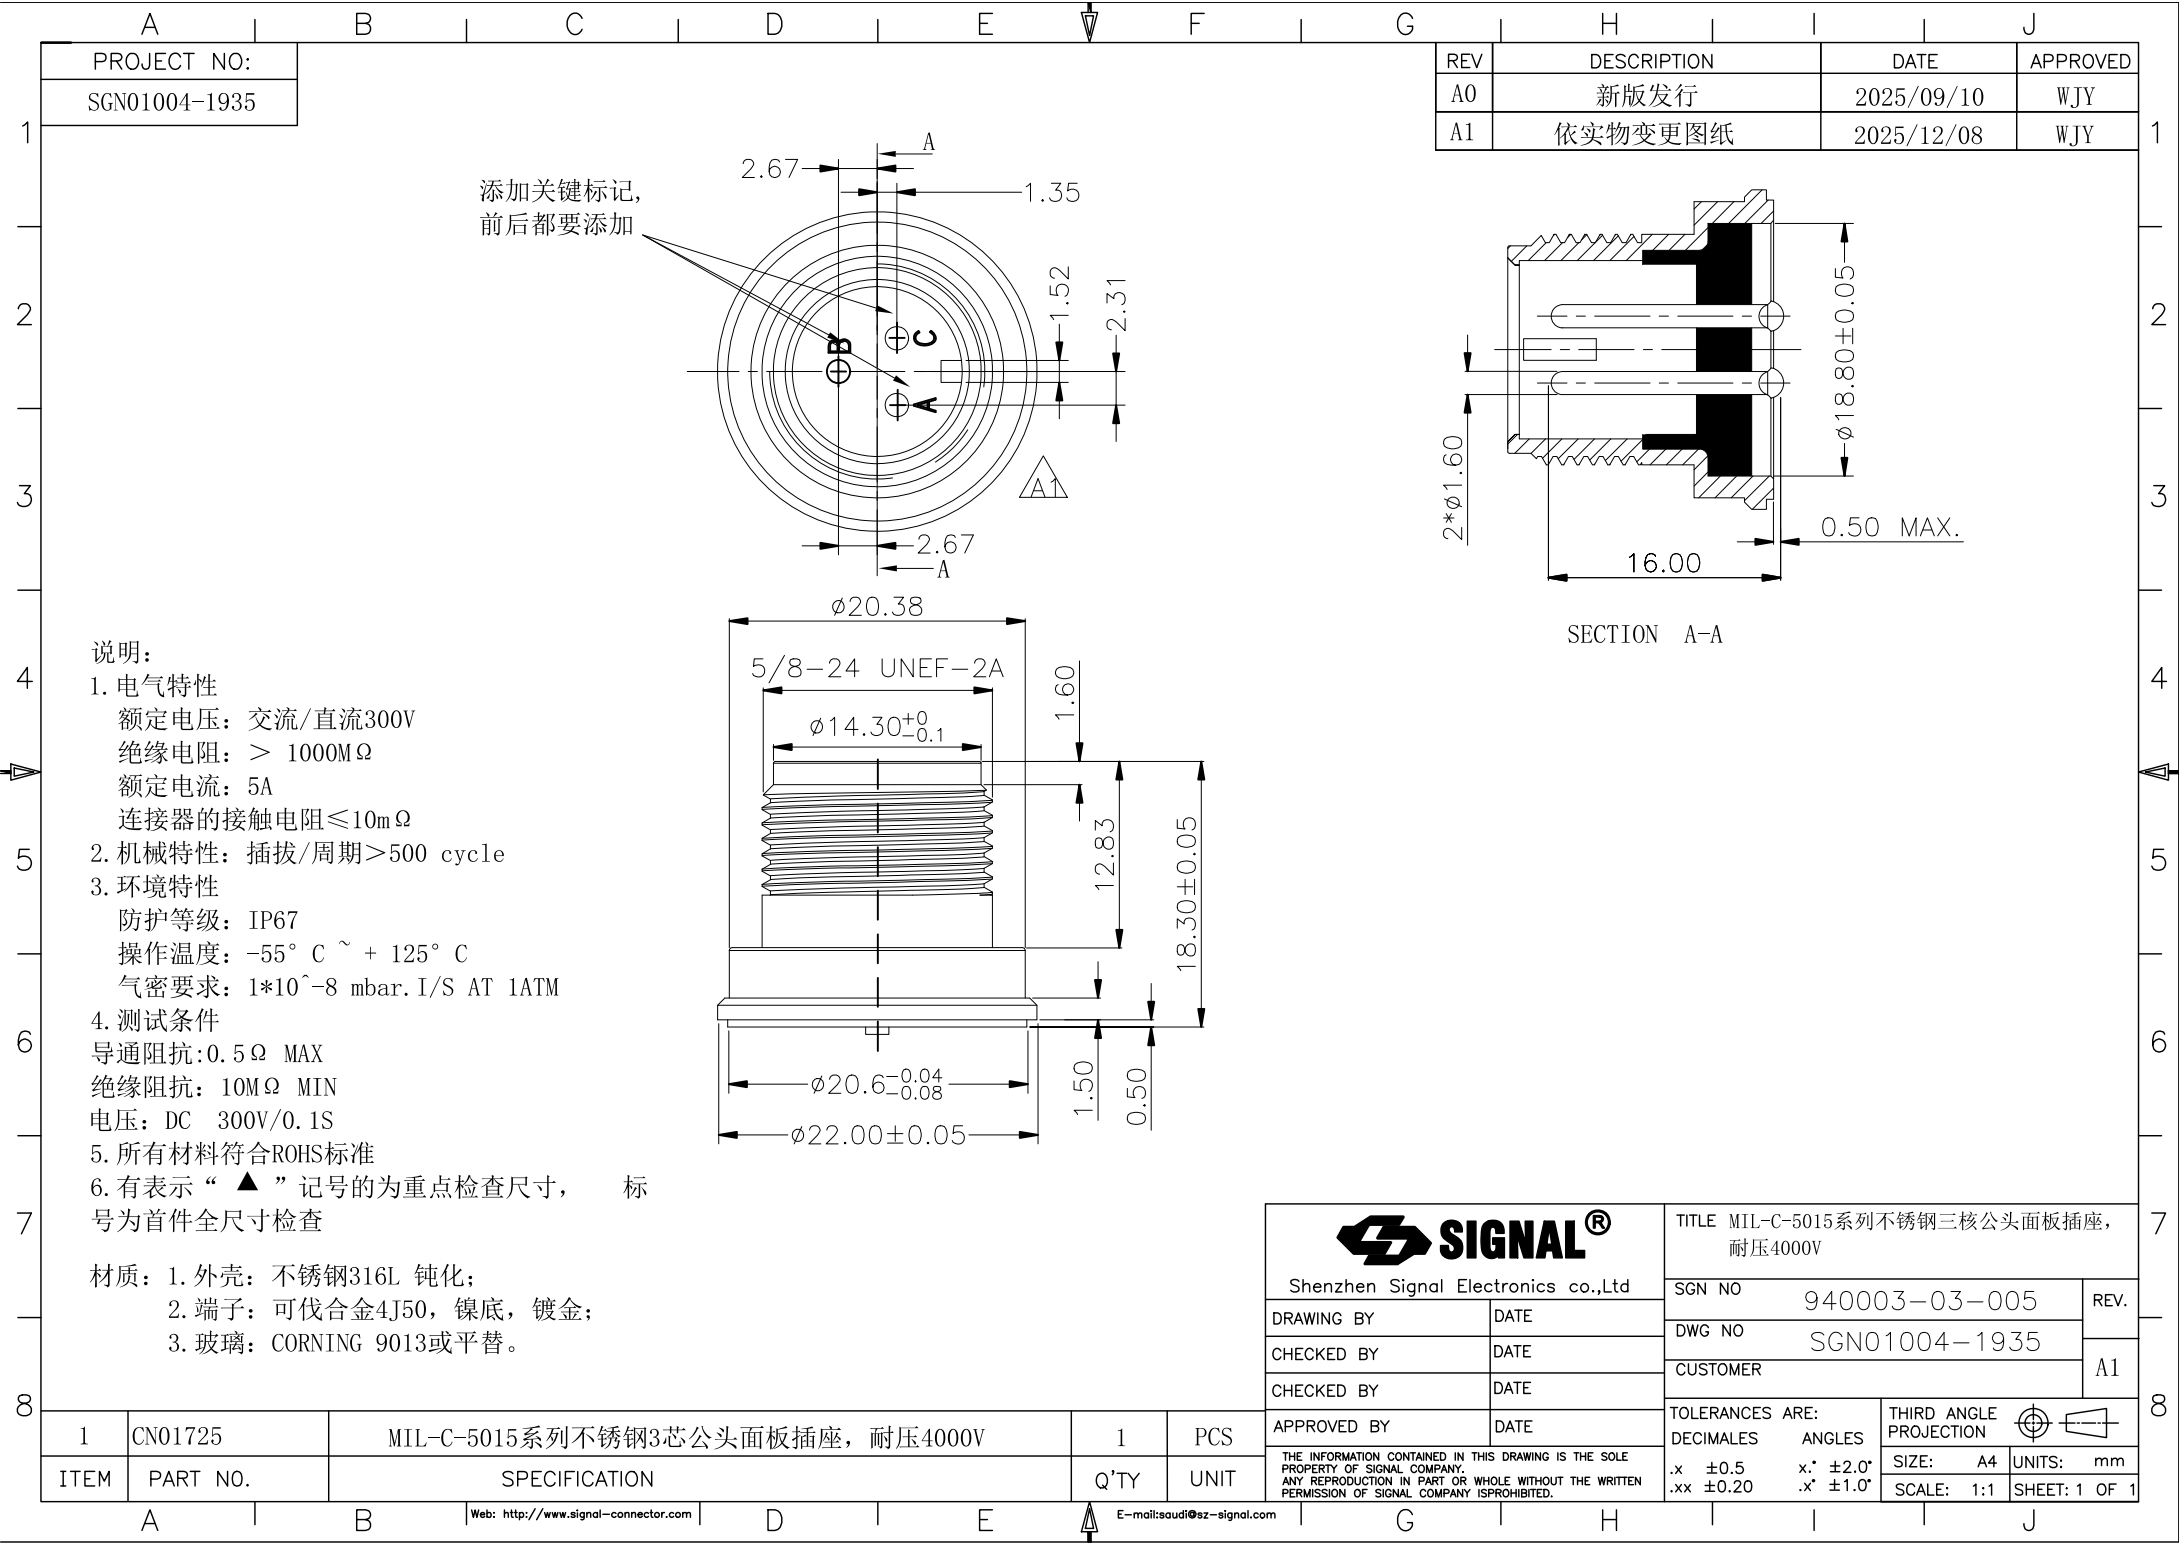

PROJECT NO:

SGN01004-1935

REV	DESCRIPTION	DATE	APPROVED
A0	新版发行	2025/09/10	WJY
A1	依实物变更图纸	2025/12/08	WJY

添加关键标记,
前后都要添加

说明:

1. 电气特性

额定电压: 交流/直流300V

绝缘电阻: > 1000MΩ

额定电流: 5A

连接器的接触电阻≤10mΩ

2. 机械特性: 插拔/周期>500 cycle

3. 环境特性

防护等级: IP67

操作温度: -55° C ~ + 125° C

气密要求: 1*10⁻⁸ mbar.I/S AT 1ATM

4. 测试条件

导通阻抗: 0.5Ω MAX

绝缘阻抗: 10MΩ MIN

电压: DC 300V/0.1S



5. 所有材料符合ROHS标准

6. 有表示“▲”记号的为重点检查尺寸, 标号为首件全尺寸检查

材质: 1. 外壳: 不锈钢316L 钝化;

2. 端子: 可伐合金4J50, 镍底, 镀金;

3. 玻璃: CORNING 9013或平替。

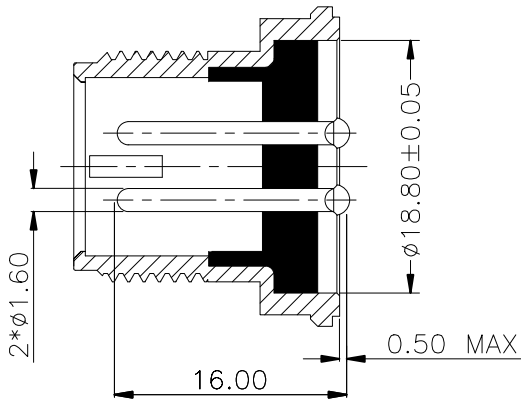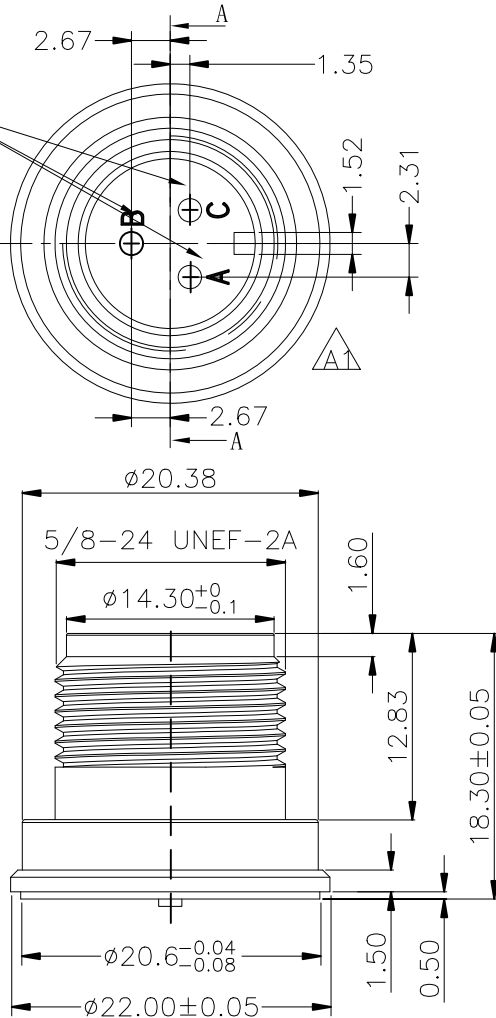

SECTION A-A

 Shenzhen Signal Electronics co.,Ltd		TITLE MIL-C-5015系列不锈钢三芯公头面板插座, 耐压4000V	
		SGN NO	940003-03-005
DRAWING BY	DATE	DWG NO	SGN01004-1935
CHECKED BY	DATE	CUSTOMER	
CHECKED BY	DATE		
APPROVED BY	DATE		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	
		DECIMALES	ANGLES
		.x ±0.5	x.* ±2.0°
		.xx ±0.20	.x.* ±1.0°
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE: 1:1	SHEET: 1 OF 1

1	CN01725	MIL-C-5015系列不锈钢3芯公头面板插座, 耐压4000V	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT