


PROJECT NO:
SGNYD2208136-2-470

| REV | DESCRIPTION | DATE | APPROVED |
|-----|-----------------------------|------------|----------|
| S0 | CREATED DRAWING | 2022/09/08 | YZH |
| S1 | CHANGE CABLE SPECIFICATIONS | 2023/10/06 | YZH |

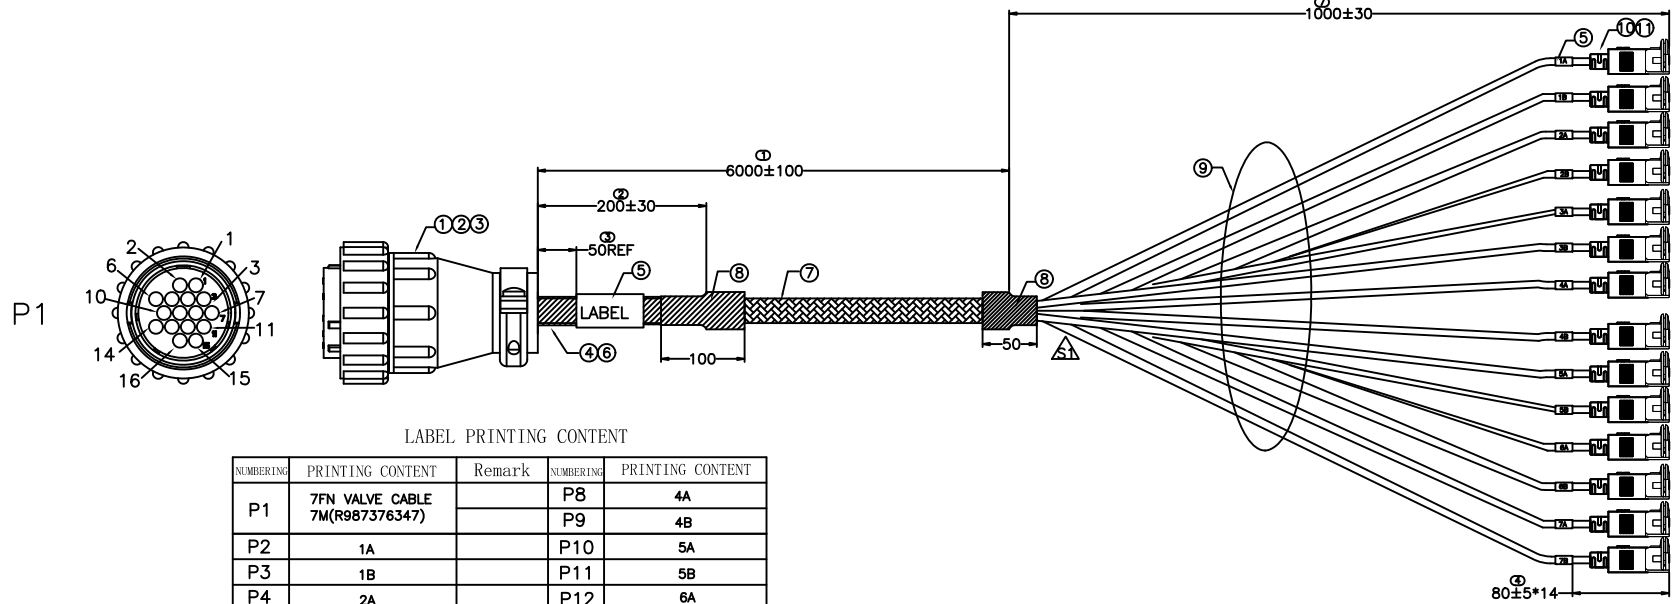

LABEL PRINTING CONTENT

| NUMBERING | PRINTING CONTENT | Remark | NUMBERING | PRINTING CONTENT |
|-----------|-----------------------------------|--------|-----------|------------------|
| P1 | 7FN VALVE CABLE 7M(R987376347) | | P8 | 4A |
| P2 | 1A | | P9 | 4B |
| P3 | 1B | | P10 | 5A |
| P4 | 2A | | P11 | 5B |
| P5 | 2B | | P12 | 6A |
| P6 | 3A | | P13 | 6B |
| P7 | 3B | | P14 | 7A |
| | | | P15 | 7B |


TESTING CONDITIONS:

- VOLTAGE:300V DC/0.1S.
- INSULATION RESISTANCE: 10 Mohms min.
- CONDUCTIVE RESISTANCE: 5 Ohms max.
- 100% OPEN AND SHORT ELECTRICAL TEST.

*ALL MATERIALS ARE RoHS COMPLIANT.

| | | | | |
|----|---------|---|----|-----|
| 12 | N/A | PH5.0 2P HOUSING PLUG BLACK PBT | 14 | SET |
| 11 | PL00011 | BLACK 45P PVC | 84 | g |
| 10 | N/A | AMP JUNIOR TIMER(C4) TE FEMALE CONNECTOR (LED:SSL-LX3044GD-12V) | 14 | SET |
| 9 | CA01496 | UL20549 18AWG*2C OD=6.5mm JACKET BLACK FR-PU | 14 | PCS |
| 8 | HT00098 | ø39 BLACK HEAT SHRINKABLE SLEEVE | 2 | PCS |
| 7 | HT00163 | ø30 Black Black braided mesh tube | 1 | PCS |
| 6 | HT00150 | ø16 BLACK HEAT SHRINKABLE SLEEVE | 1 | PCS |
| 5 | LB00007 | LILONG LABEL HALF TRANSPARENT HALF WHITE L*W=25*45MM | 15 | PCS |
| 4 | CA00518 | 18AWG HOOK UP WIRE | 1 | SET |
| 3 | TE01319 | TERMINAL(AMP P/N:66101-4) | 16 | PCS |
| 2 | CN01294 | 16PIN CONNECTOR(AMP P/N:206037-1) | 1 | SET |
| 1 | WK00773 | 16PIN CONNECTOR BACKSHELL CABLE CLAMP(AMP P/N:206070-1) | 1 | SET |

| ITEM | PART NO. | SPECIFICATION | Q'TY | UNIT |
|------|----------|---------------|------|------|
|------|----------|---------------|------|------|

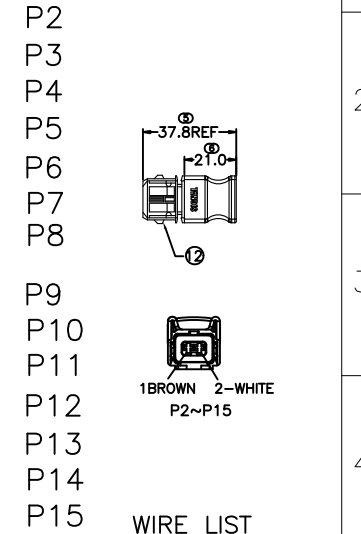

WIRE LIST

| P1 | P2~P15 |
|----------|--------|
| 1 BROWN | 1A |
| 2 BROWN | 1B |
| 3 BROWN | 2A |
| 4 BROWN | 2B |
| 5 BROWN | 3A |
| 6 BROWN | 3B |
| 7 BROWN | 4A |
| 8 BROWN | 4B |
| 9 BROWN | 5A |
| 10 BROWN | 5B |
| 11 BROWN | 6A |
| 12 BROWN | 6B |
| 13 BROWN | 7A |
| 14 BROWN | 7B |
| 15 WHITE | |
| 16 WHITE | |

SIGNAL[®]
Shenzhen Signal Electronics Co., LTD

TITLE
CS-CBL-VLV-7FN-A16FAXN
-070-C4JFAXL WIRE HARNESS

| | | | | | |
|--|------|-----------------|------------------------|----------|---------------|
| DRAWN BY | DATE | SGN NO | 940000-00-693 | REV. | |
| CHECKED BY | DATE | DWG NO | SGNYD2208136-2-470 | S1 | |
| CHECKED BY | DATE | CUSTOMER | R987376347 | | |
| APPROVED BY | DATE | TOLERANCES ARE: | THIRD ANGLE PROJECTION | | |
| <small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small> | | DECIMALES | ANGLES | SIZE: A4 | UNITS: mm |
| | | .x ±0.5 | x.' ±2.0' | SCALE: | SHEET: 1 OF 1 |
| | | .xx ±0.20 | .x' ±1.0' | | |